

Sink Module 6300-ES30, Right incl. worktop with 2 shallow sink bowls, width 99 cm



Wall mounted, motorised Sink Module 6300-ES30 contains two shallow sink bowls with overflow.

The module is delivered complete and available in left, centre, or right version.

The modules have a 10 mm shorter width to automatically give 5 mm gap on either side of the unit for the up and down movement. They are also 15 mm shallower in depth to make room for splash protection/tiles.

The anti-pinch strip is placed under the front edge of the worktop. If anything touches the strip, the lift unit stops.

Electronics and motor system "Plug and Play".

The module can be integrated into environments from any kitchen manufacturer.

Functions and advantages

- Motorised wall mounted, adjustable 30 cm
- Adjustable depth 576-606 mm incl. Front
- Tilttable worktop plane for adjustment

The combination includes the following products

Art.no	Description	EAN	Qty
6300HA-099	BASELIFT 6300HA - 99,0 cm	7340193102161	1.00 pcs
385H-099	103 mm Alu-Front, 99.0 cm width		1.00 pcs
61320	Control button for worktop lift - ALU-design - <i>Baselift & Centerlift</i>	7340193105438	1.00 pcs
61360	Safety lock to Baselift	7340193105582	1.00 pcs
6260-005	Fitting kit for cover panels 6260-240 - <i>Baselift & Manulift</i>	7340193108286	1.00 pcs
6260-240	Cover panels, Worktop lifts (59.0-240.0 cm) - <i>Baselift & Manulift</i>	7340193108279	1.00 pcs
M-BSA	Countertop - Laminate, 450-610 mm depth		0.99 m
6943-06	Rear edge trim ALU for worktop, (per meter)	7340193105520	0.99 m
618ES30-077	Inset Kitchen Sink Stainless Steel ES30 - 76.6 cm - <i>Incl. flexible plumbing kit</i>	7340193105148	1.00 pcs
M-BSUL	Built-under stainless steel sink		1.00 pcs
60210	Granberg mixer tap 60210 Incl. dishwasher shut off	7340193105315	1.00 pcs
61800	Flexible water hoses 2-pack, 3/8, length 500mm	7340193105346	1.00 pcs

Specifications

Installation

Wall

Front height

103 mm

Height adjustment

Motorised, steplessly adjustable 300 mm (700-1000 mm excl. top board)

Speed level

30 mm/sec.

Operation

Control button, ALU-design

Safety

The safety strip is placed under the front edge of the worktop. If anything touches the safety strip, the lifting unit stops

Electrical connection

Plug for 230 V, max 5.0 A

Lifting force

100 kg

IP-class

IP 20

Delivery modules

Ready-mounted worktop incl. safety switch, motors.

Frame depth

576 - 606 mm from wall (Incl. front)

Material

Frame:

Aluminum

Cover panels for covering installations under the worktop:

12 mm white melamine. Several colours can be offered upon request.

Fronts:

White lacquered aluminum. Several colours can be offered upon request.

Top board:

30 mm worktop in high pressure laminate. Post-shaped front edge. Several colours can be offered upon request.

Plumbing connections

Connection is made with flexible hoses

Space to wall / adjoining cabinet

5 mm

Space to wall (for tiles)

15 mm


Tiling

From 700 mm above floor (alternatively all the way down to the floor)


Warranty

2 years Warranty


This product is covered by a 2-year warranty against manufacturing defects.

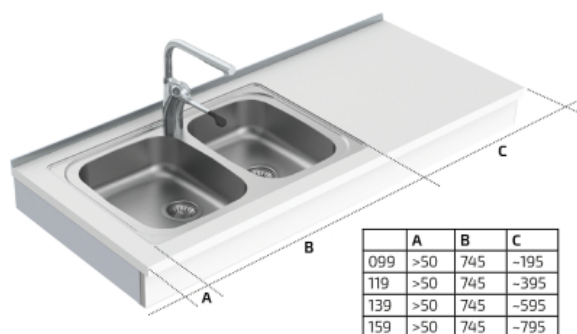

	A	B	C
099	>50	745	~195
119	>50	745	~395
139	>50	745	~595
159	>50	745	~795

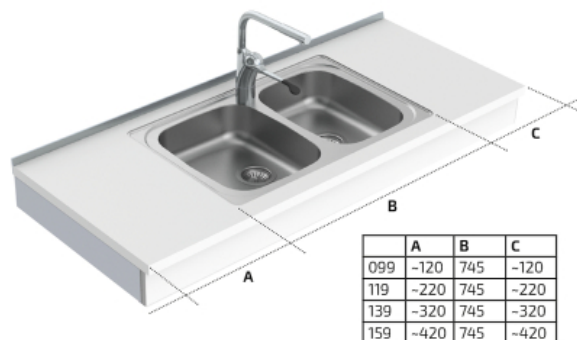

	A	B	C
099	~120	745	~120
119	~220	745	~220
139	~320	745	~320
159	~420	745	~420

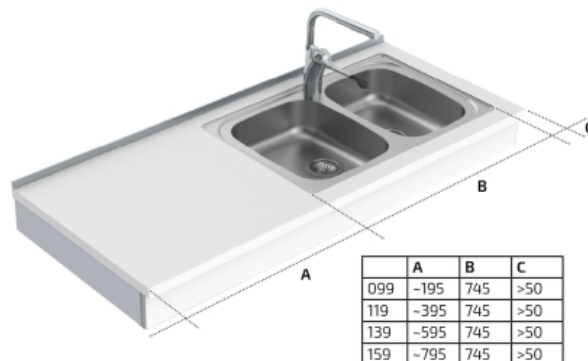

	A	B	C
099	~195	745	>50
119	~395	745	>50
139	~595	745	>50
159	~795	745	>50

