

Draft specification



**BASELIFT CORNER 6311LA**  
**Manufacturer:** Granberg

**Article Info**  
104.5 x 104.5 cm  
45° front edge, 90° wall

<b>Art.no</b>	<b>Description</b>
6311LA-1045	BASELIFT CORNER 6311LA

<b>EAN</b>
7340193103519

# Specifications

## Installation

Floor-mounted

## Front height

40 mm

## Corner solution

45° front edge, 90° wall

## Height adjustment

Motorised, steplessly adjustable 300 mm (700-1000 mm excl. top board)

## Speed level

30 mm/sec.

## Operation

Corded button or radio control

## Safety

The safety strip is placed under the front edge of the worktop.  
If anything touches the safety strip, the lifting unit stops

## Electrical connection

Plug for 230 V, 2 x 5A

## Plumbing connections

Connection is made with flexible hoses

## Lifting force

100 kg

## IP-class

IP 20

## Frame depth

560-590 mm from wall

## Dimensions cover plates

2 pcs, height 438 mm, thickness 12-20 mm

## Width worktop

Width = width of the lift

## Depth worktop

565-630 mm (15 mm shallower than worktops on fixed cabinets)

## Space to wall / adjoining cabinet

5 mm

## Space to wall (for tiles)

15 mm

## Tiling

From 700 mm above floor (alternatively all the way down to the floor)

## Delivery modules

Ready-mounted worktop incl. safety switch, motors

## Fittings supplied

Bracket for fronts and top board




## Material

Aluminium frame

## Warranty

2 years Warranty

This product is covered by a 2-year warranty against manufacturing defects.

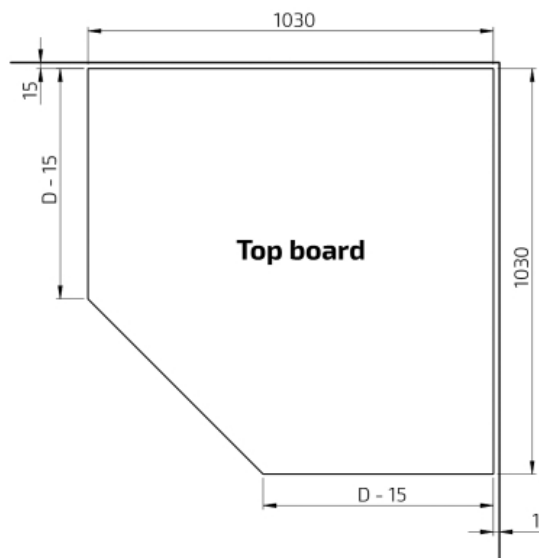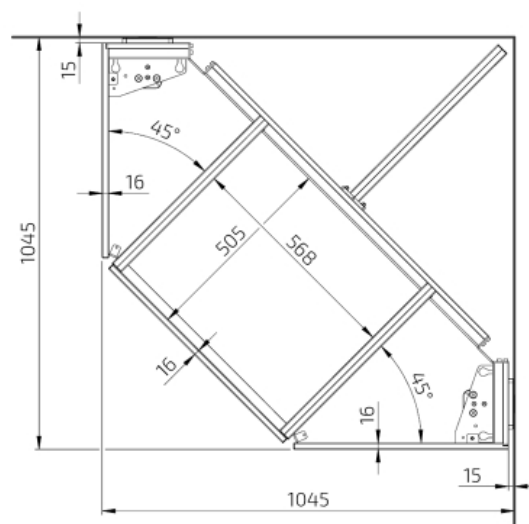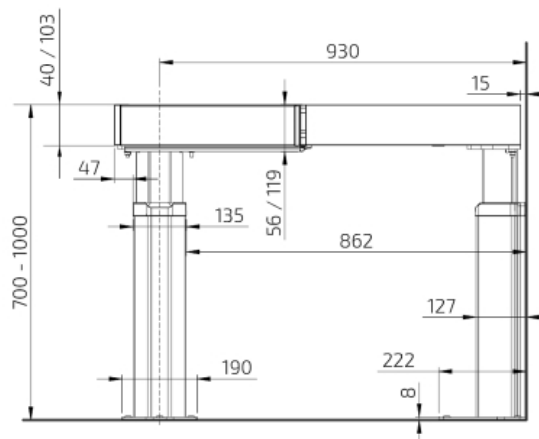

**D** = Depth of top board on fixed cabinets